Waterproofing an underground structure under construction

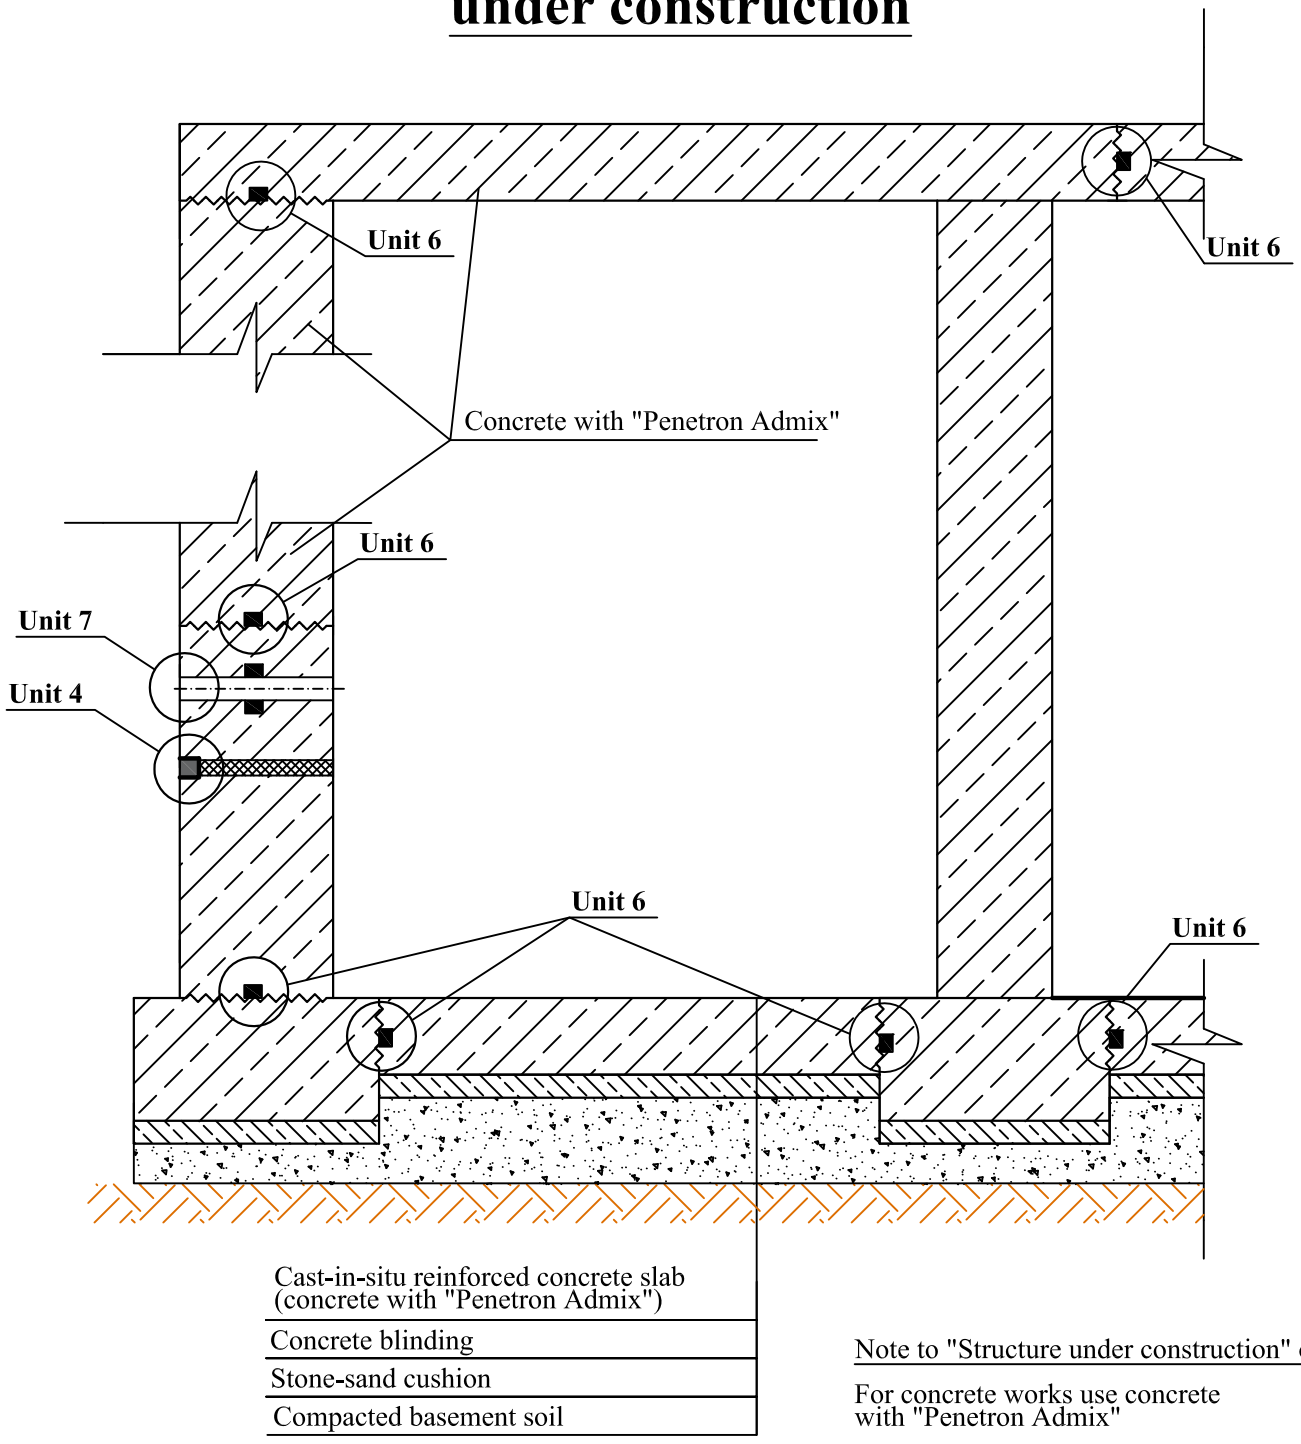

Application of the materials:

1. Prepare Penetron Admix in ratio of 0.6-0.7L of water per 1 kg of a dry admixture or by volume - 1 portion of water per 1.5 portion of a dry admixture. Consumption of the Penetron Admix waterproofing admixture is 1% of cement weight in a concrete mix or 4 kg of the Penetron Admix per 1m³ of concrete.
2. Add/pour the slurry in a ready mix truck.
3. After being added to a concrete mix, the Penetron Admix mortar is stirred in a ready mix truck for at least 10 minutes. The Penetron Admix waterproofing admixture may be used without limitation with any other admixtures in concrete.
4. For the units refer appropriate drawings #